





Fixation and flexibility

## **Cell clamps**

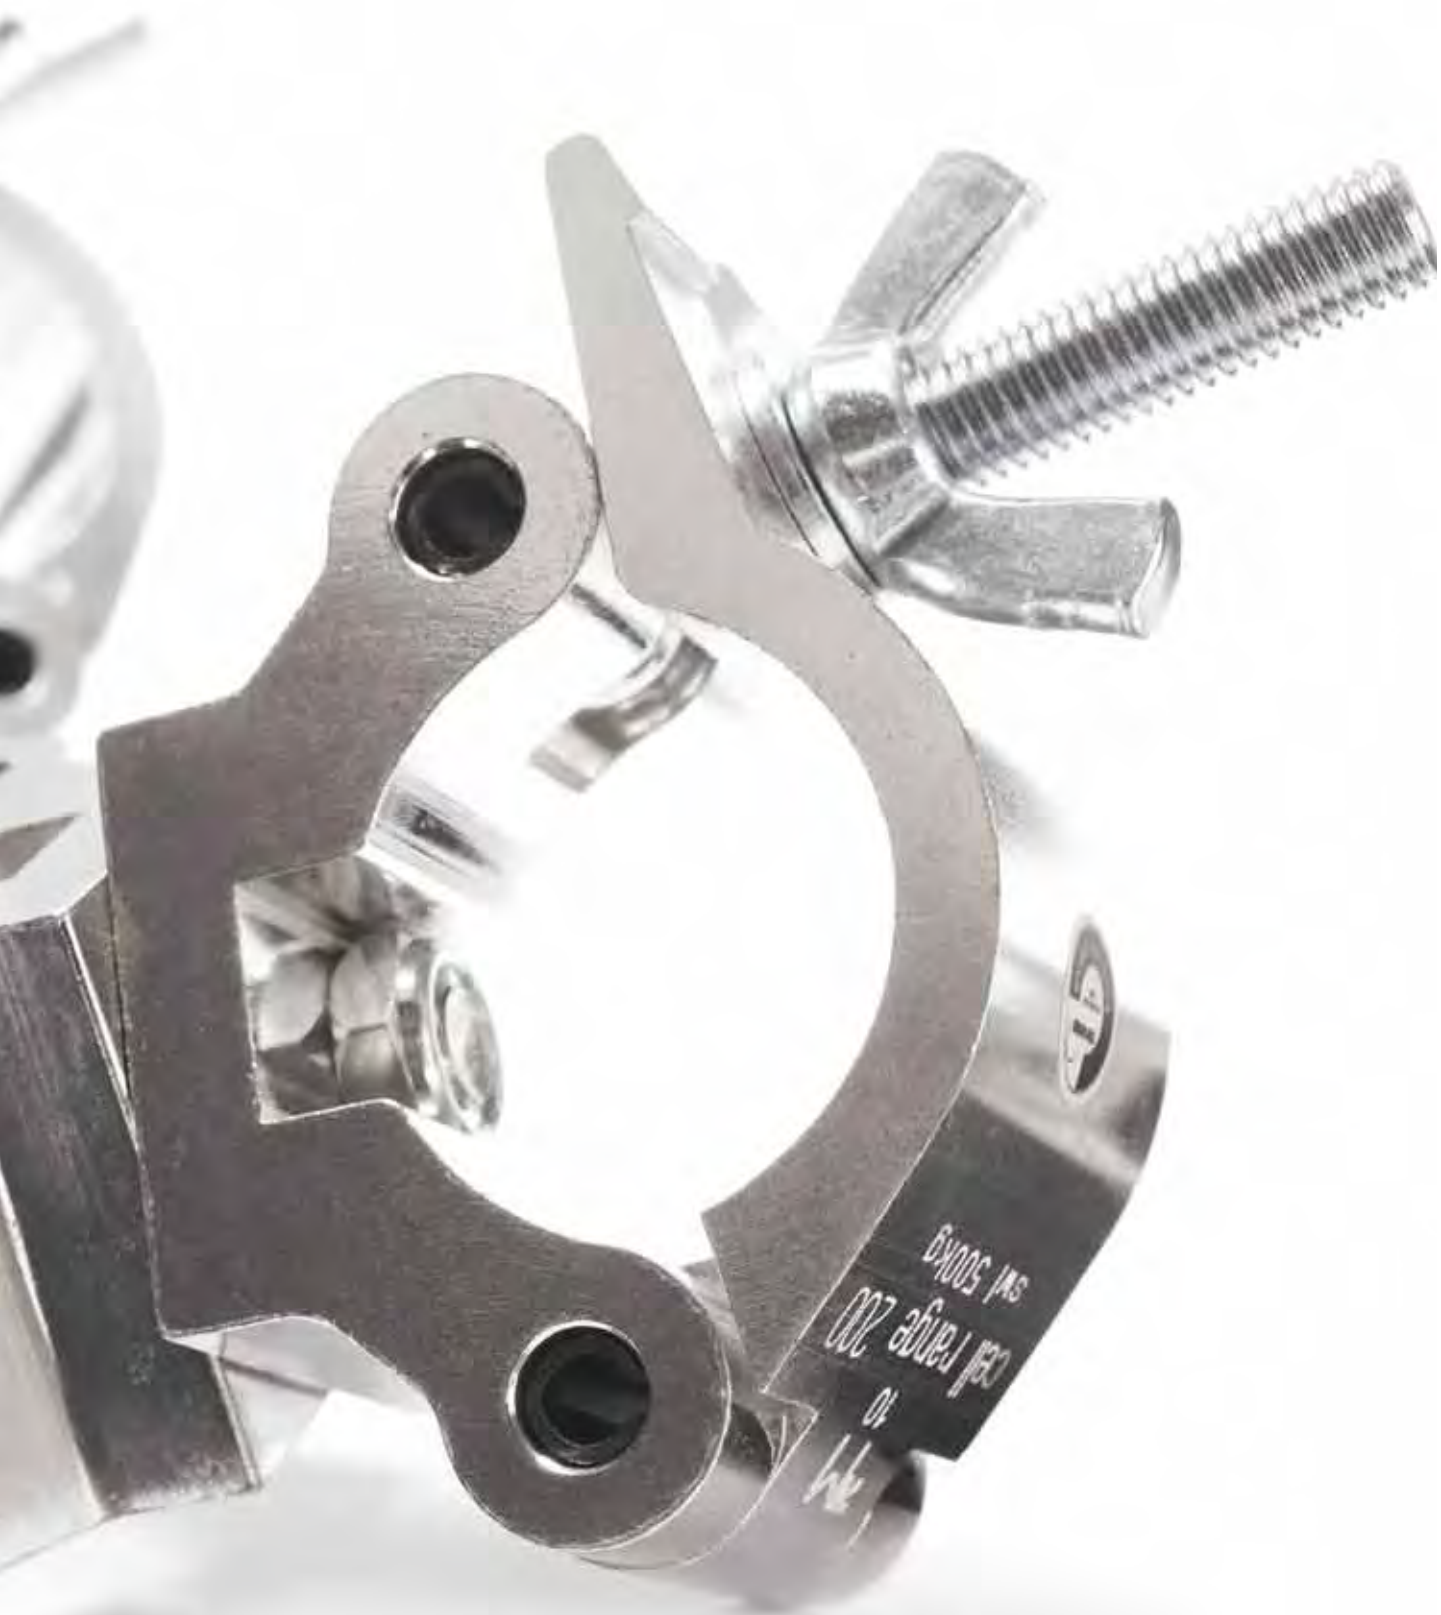

## Fixation and flexibility **CELL 300 SERIES**




- designed for tubes 60 – 63,5 mm (2 3/8" – 2 1/2")
- supplied with M12 closing bolt
- mounting hole suitable for up to 13 mm (1/2") bolt
- made from ultra high tensile aluminium alloy
- professional micropercussion marking
- highly polished surface
- anodized versions available on special request






CELL 301			Clamp basic
SWL	Weight	Ø	
500 Kg	0,65 Kg	60-63,5 mm	Basic Clamp can be used for most applications.
1102 lbs	1.43 lbs	2.36"-2.5"	

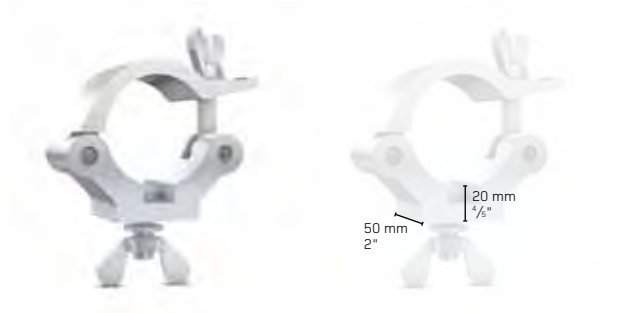


CELL 302			Clamp with bolt and wingnut
SWL	Weight	Ø	
500 Kg	0,75 Kg	60-63,5 mm	Clamp supplied with M12 x 35 bolt and wingnut.
1102 lbs	1.65 lbs	2.36"-2.5"	

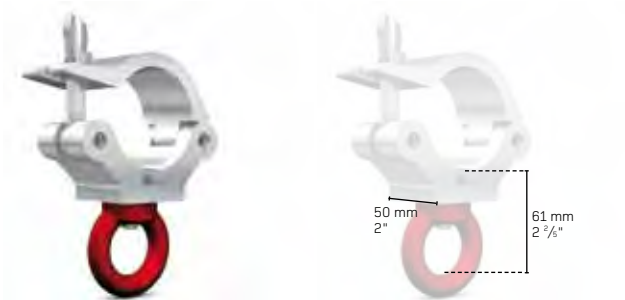


CELL 303			Clamp with lifting eye
SWL	Weight	Ø	
340 Kg	1,00 Kg	60-63,5 mm	Clamp supplied with steel eye for rope or cable attachment.
749 lbs	2.20 lbs	2.36"-2.5"	
500 Kg	1,00 Kg	60-63,5 mm	
1102 lbs	2.20 lbs	2.36"-2.5"	



CELL 304			Swivel coupler
SWL	Weight	Ø	
500 Kg	1,50 Kg	60-63,5 mm	Set of two clamps free to rotate 360° for connection of two tubes.
1102 lbs	3.30 lbs	2.36"-2.5"	

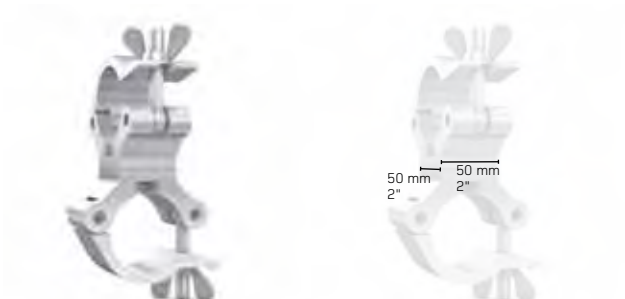

CELL 305			90° fixed coupler
SWL	Weight	Ø	
500 Kg	1,50 Kg	60-63,5 mm	Set of two clamps fixed at 90° to each other for connection of two tubes.
1102 lbs	3.30 lbs	2.36"-2.5"	

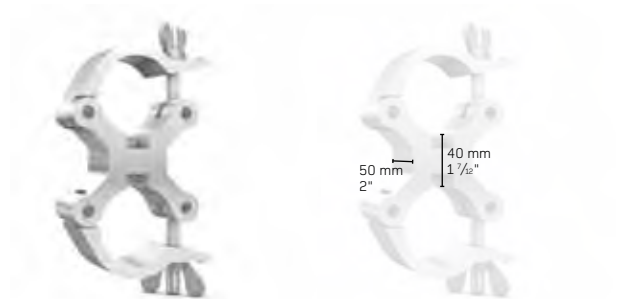

CELL 306			Parallel coupler
SWL	Weight	Ø	
500 Kg	1,50 Kg	60-63,5 mm	Set of two clamps fixed parallel to each other for connection of two tubes.
1102 lbs	3.30 lbs	2.36"-2.5"	