




Fixation and flexibility

Cell clamps

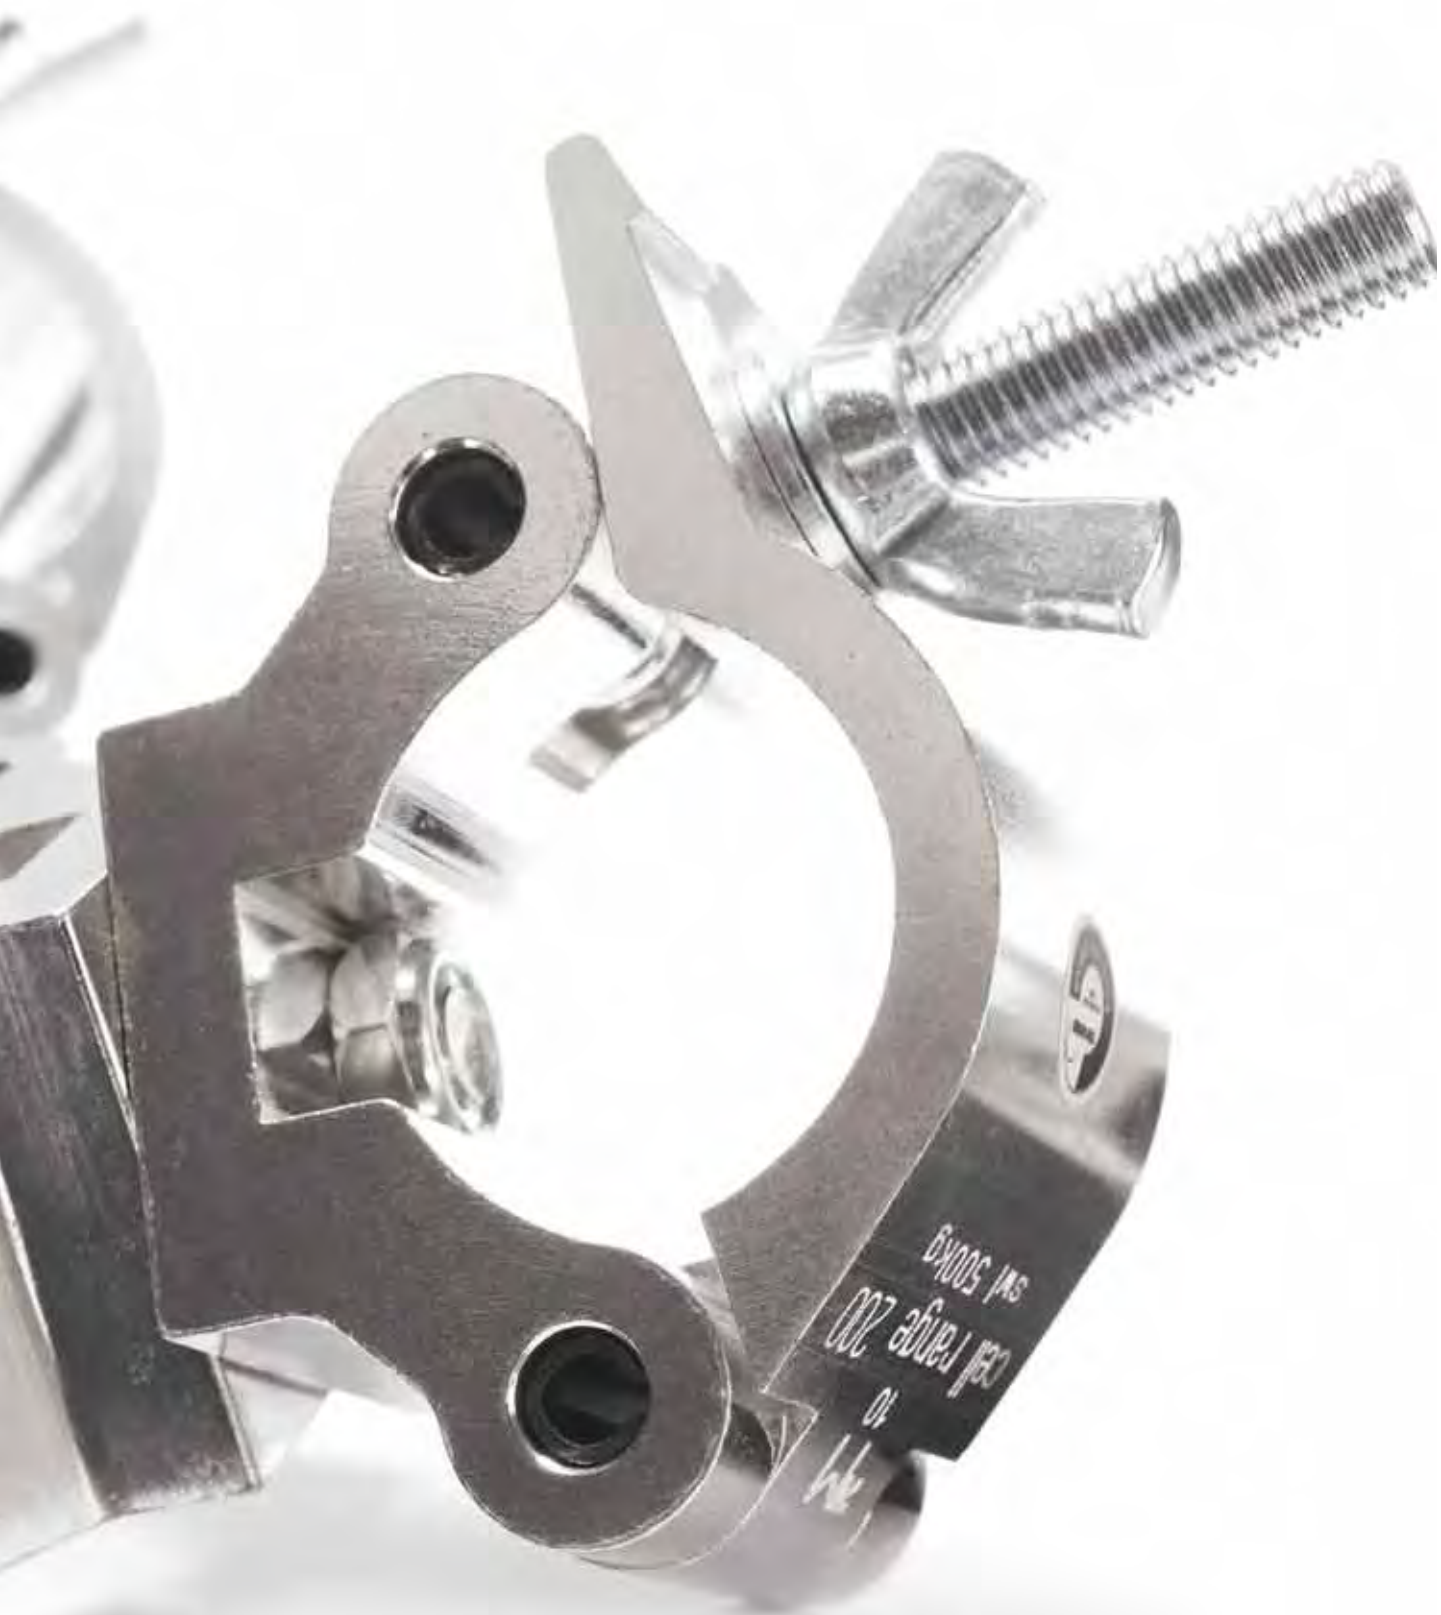

Fixation and flexibility

CELL 500 SERIES

- ideal for exhibition & light duty applications
- low profile extrusion designed for tubes 48 – 51 mm (1 7/8" – 2")
- supplied with M10 closing bolt
- mounting hole suitable for up to 10,5 mm (5/12") bolt
- made from ultra high tensile aluminium alloy
- professional micropercussion marking
- highly polished surface
- anodized versions available on special request




CELL 501			Clamp basic
SWL	Weight	Ø	
75 Kg	0,14 Kg	48-51 mm	Basic clamp can be used for lightweight applications.
165 lbs	0.30 lbs	1.89"-2"	



CELL 502			Clamp with bolt and wingnut
SWL	Weight	Ø	
75 Kg	0,22 Kg	48-51 mm	Clamp supplied with M10 x 30 bolt and wingnut.
165 lbs	0.47 lbs	1.89"-2"	



CELL 504			Swivel coupler
SWL	Weight	Ø	
75 Kg	0,27 Kg	48-51 mm	Set of two clamps free to rotate 360° for connection of two tubes.
165 lbs	0.60 lbs	1.89"-2"	

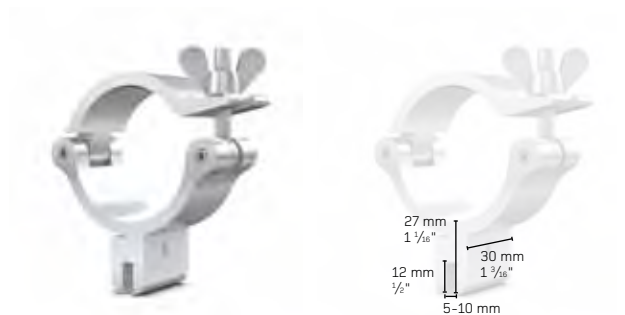

CELL 511			Panel holder
SWL	Weight	Ø	
75 Kg	0,22 Kg	48-51 mm	Panel thickness range 5-10 mm (0.19" -0.39")
165 lbs	0.47 lbs	1.89"-2"	