


A close-up photograph of a metallic, cylindrical cell clamp. The clamp has a polished, reflective surface and a central hole. It is positioned in the foreground, slightly out of focus. In the background, another similar clamp is visible, also out of focus. A green rectangular overlay is present in the upper left quadrant, containing white text.

Fixation and flexibility


Cell clamps

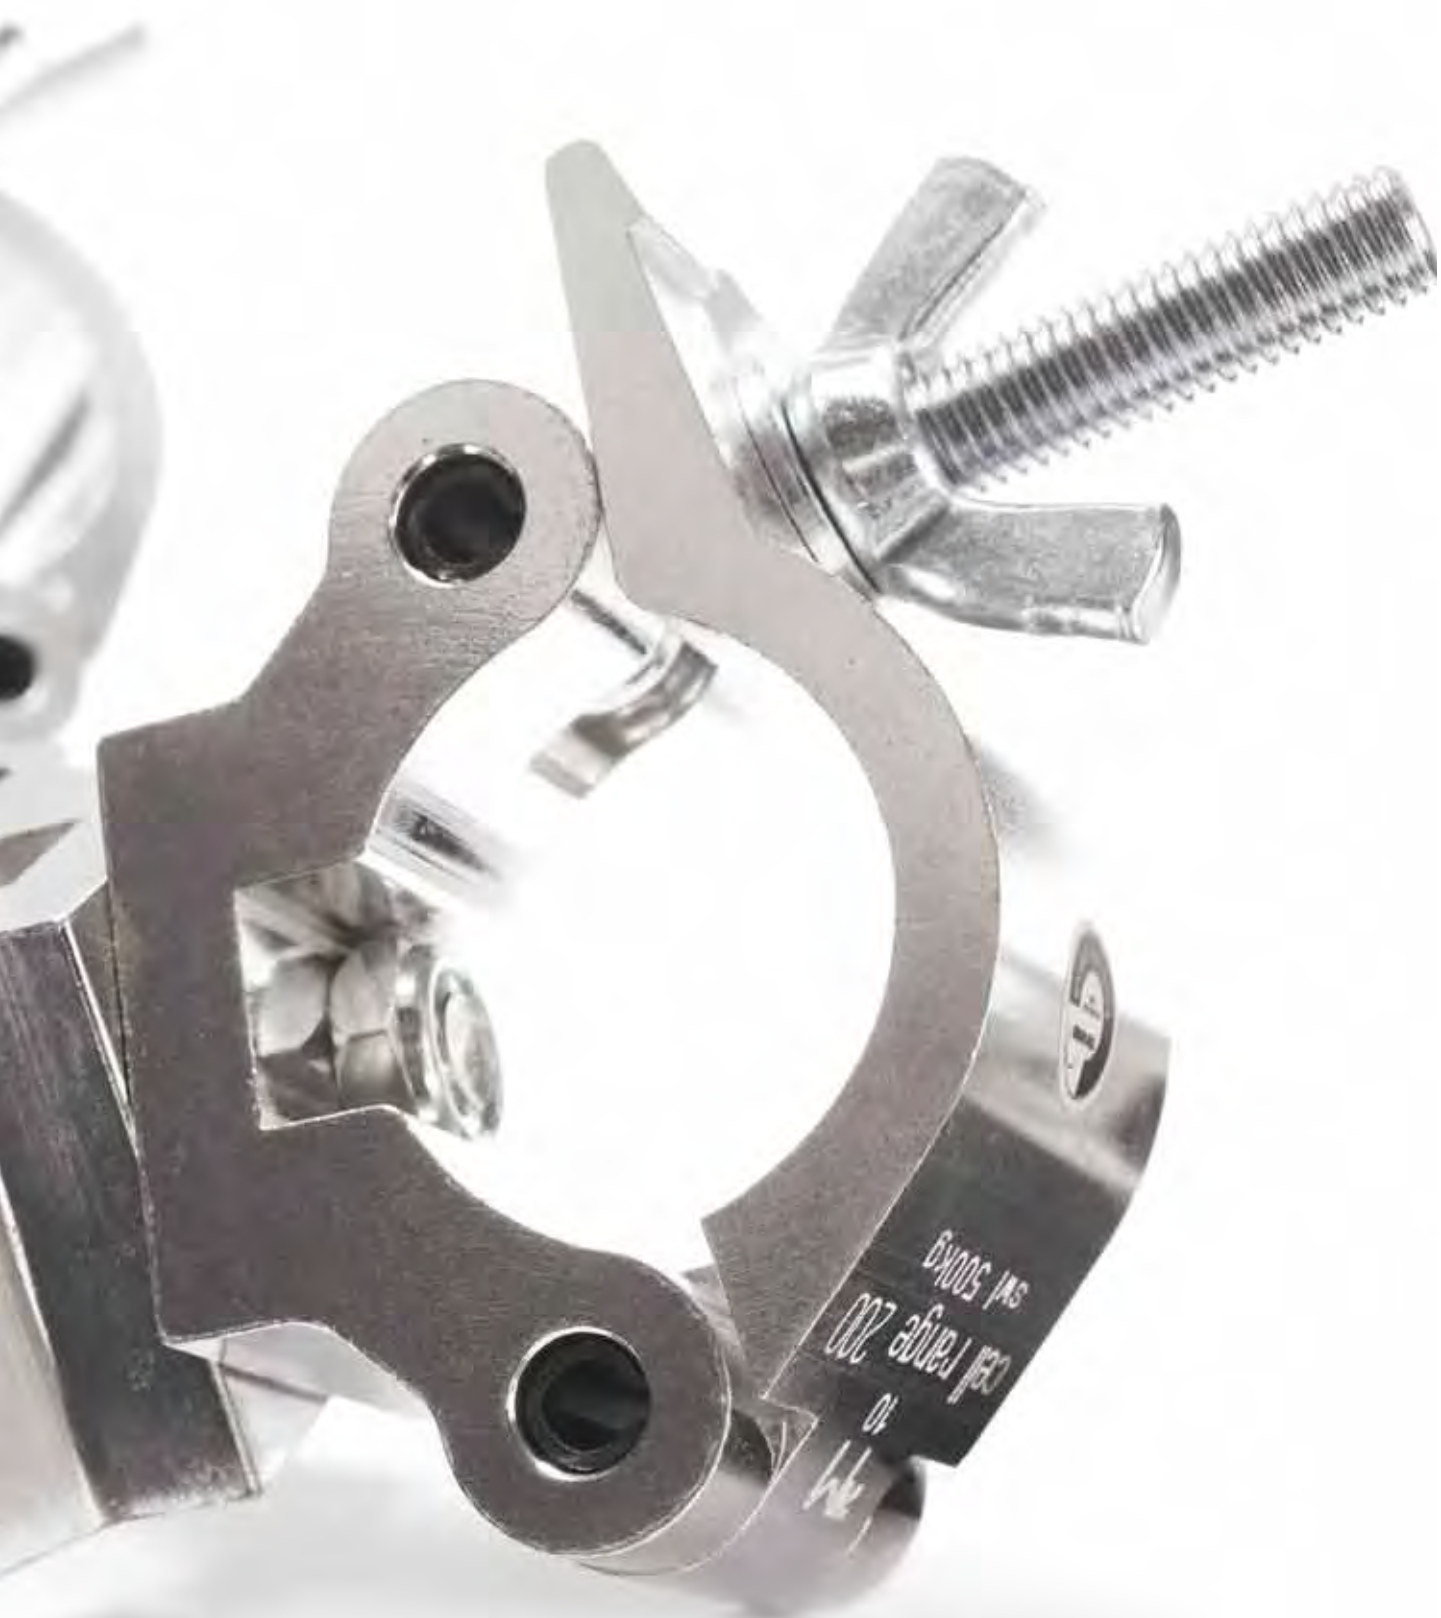


Fixation and flexibility

CELL 600 SERIES


- secure wrap around hook clamp
- designed for tubes 48 – 51 mm (1 7/8" – 2")
- supplied with M12 closing bolt
- mounting hole suitable for up to 13 mm (1/2") bolt
- made from ultra high tensile aluminium alloy
- professional micropercussion marking
- highly polished surface
- anodized versions available on special request

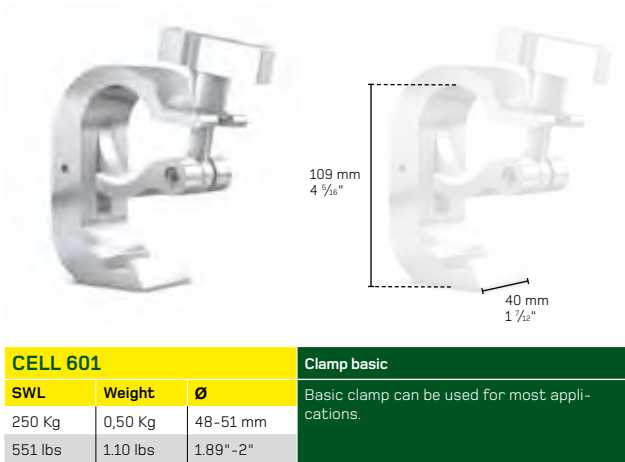

CELL 601			Clamp basic
SWL	Weight	Ø	Basic clamp can be used for most applications.
250 Kg	0,50 Kg	48-51 mm	
551 lbs	1.10 lbs	1.89"-2"	

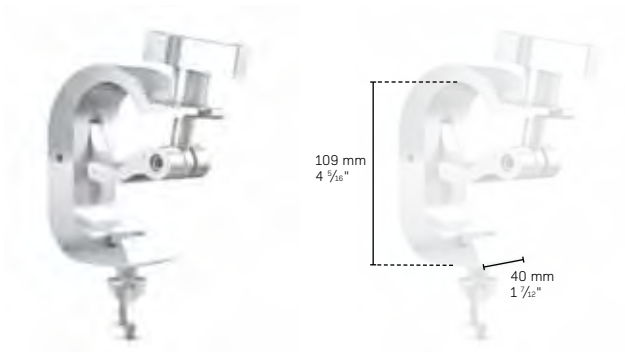

CELL 602			Clamp basic with bolt and wingnut
SWL	Weight	Ø	Clamp supplied with M12 x 35 bolt and wingnut.
250 Kg	0,58 Kg	48-51 mm	
551 lbs	1.28 lbs	1.89"-2"	

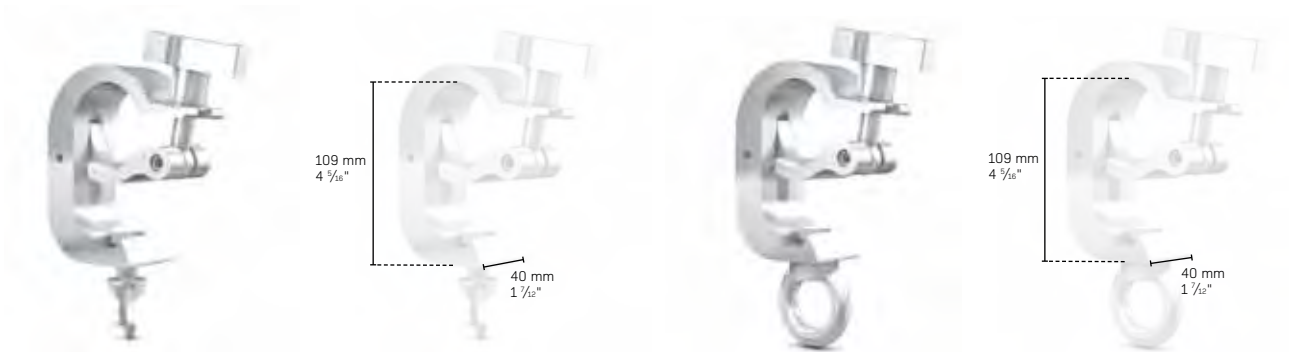

CELL 603			Clamp with lifting eye
SWL	Weight	Ø	Clamp supplied with steel eye for rope or cable attachment.
250 Kg	0,75 Kg	48-51 mm	
551 lbs	1.65 lbs	1.89"-2"	