



O-RING O-RING-t
Available for SWL up to 6t (13227 lbs)



SHACKLE SHA-t
Available for SWL up to 6.5t (14330 lbs)



SECONDARY SAFETY CAR-WIR-t-I
Available diameters: 2mm (0.08")
3mm (0.12")
SWL 60-100 kg (132-220 lbs)



STEEL FLEX STE-F-USEFUL-I
Black roundsling with galvanized aircraft cable on the inside. Increases safety.
• higher heat resistance
• no backup rigging required
• conforms load to grip easily



WT1 BS - WATER TANK WT1 BS
• 800 x 800 x 900 mm (2.62' x 2.62' x 2.95')
• provides 550kg ballast
• can be piled-up two on each other using reinforcing stacking kit



STEEL WIRES STE-d-I
Available in various lengths and diameters
Standard lengths marked with colors




CELL 201 - DROPNET
dropnet lock



ADJUSTABLE CHAIN ADJ-CH-t-I
Available SWL up to 3,5t
for use in universal size systems



TURNBUCKLES TUR-d-ending / ending
For tensioning wires. Available lengths:
• 229 mm / 9" (fork/fork or fork/eye)
• 304,8 mm / 12" (fork/eye)

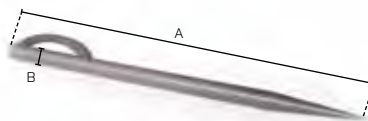

STEEL SPIKE SPI-M290 / M390; M520 / M950
For releasing stuck connections or tightening.

	A		B	
M290/M390	400 mm	15.75"	16 mm	0.63"
M520/M950	400 mm	15.75"	18 mm	0.71"



TENSIONING MILOS STRAP MIL-STR
25 mm x 1300 mm (1" x 51.2")